3.3 Mounting the Steering System

Before using Evo Remote Control, please follow the fixing guide to fix the Evo Remote Control in the proper position.

When using the Evo Remote Control, please prepare a steering wheel (not supplied with NAVY Evo or the Evo Remote Control) and mount it on the corresponding position to control the direction.

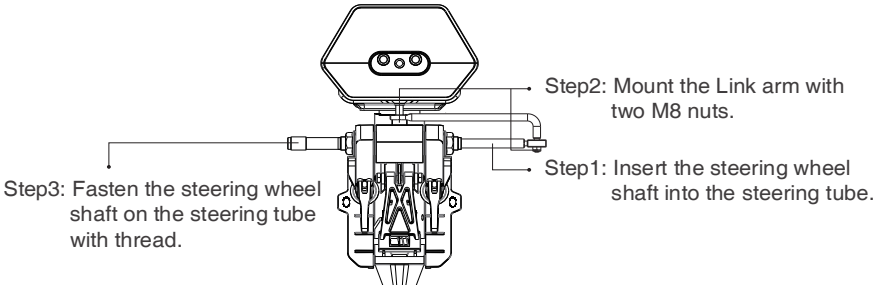

Figure 3-3

3.4 Mounting the Evo Tiller

1. Rotate the handle shaft counterclockwise, then pull out the handle shaft and decorative cover.

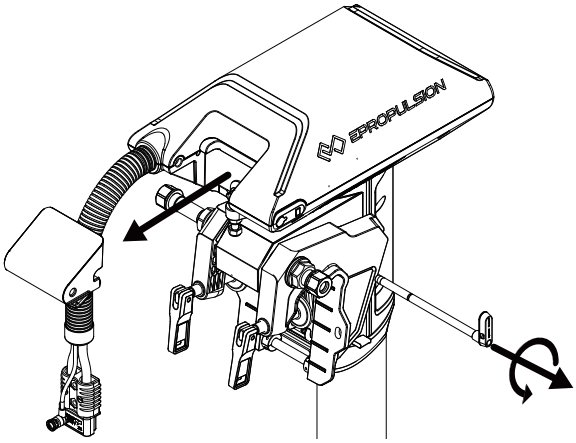

Figure 3-4

2. Install the tiller to the machine.

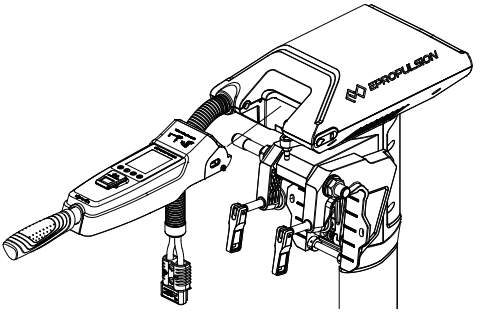

Figure 3-5

3. Insert the handle shaft into the hole to the end and lock it clockwise.

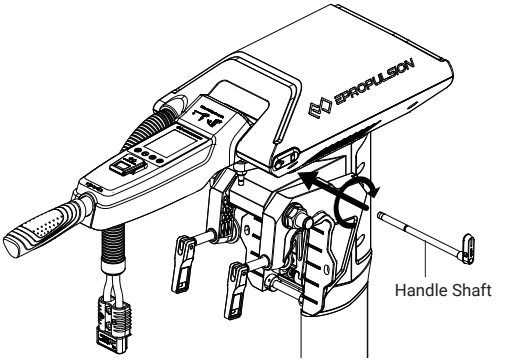

Figure 3-6

4. Connect the communication cable of Evo Tiller to the communication port of the NAVY Evo.

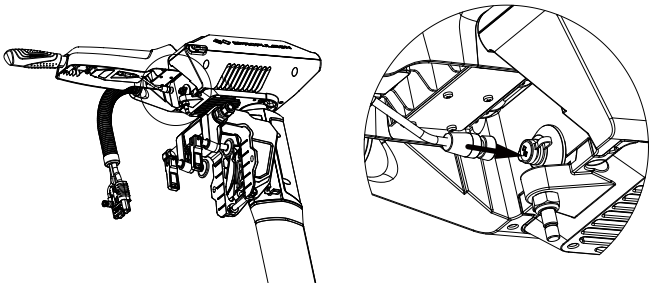

Figure 3-7

⚠ Do not use the tiller handle to tilt or lift your outboard. The damage of tiller or battery base due to pushing down the handle is out of warranty.